


WYM 17089M79M





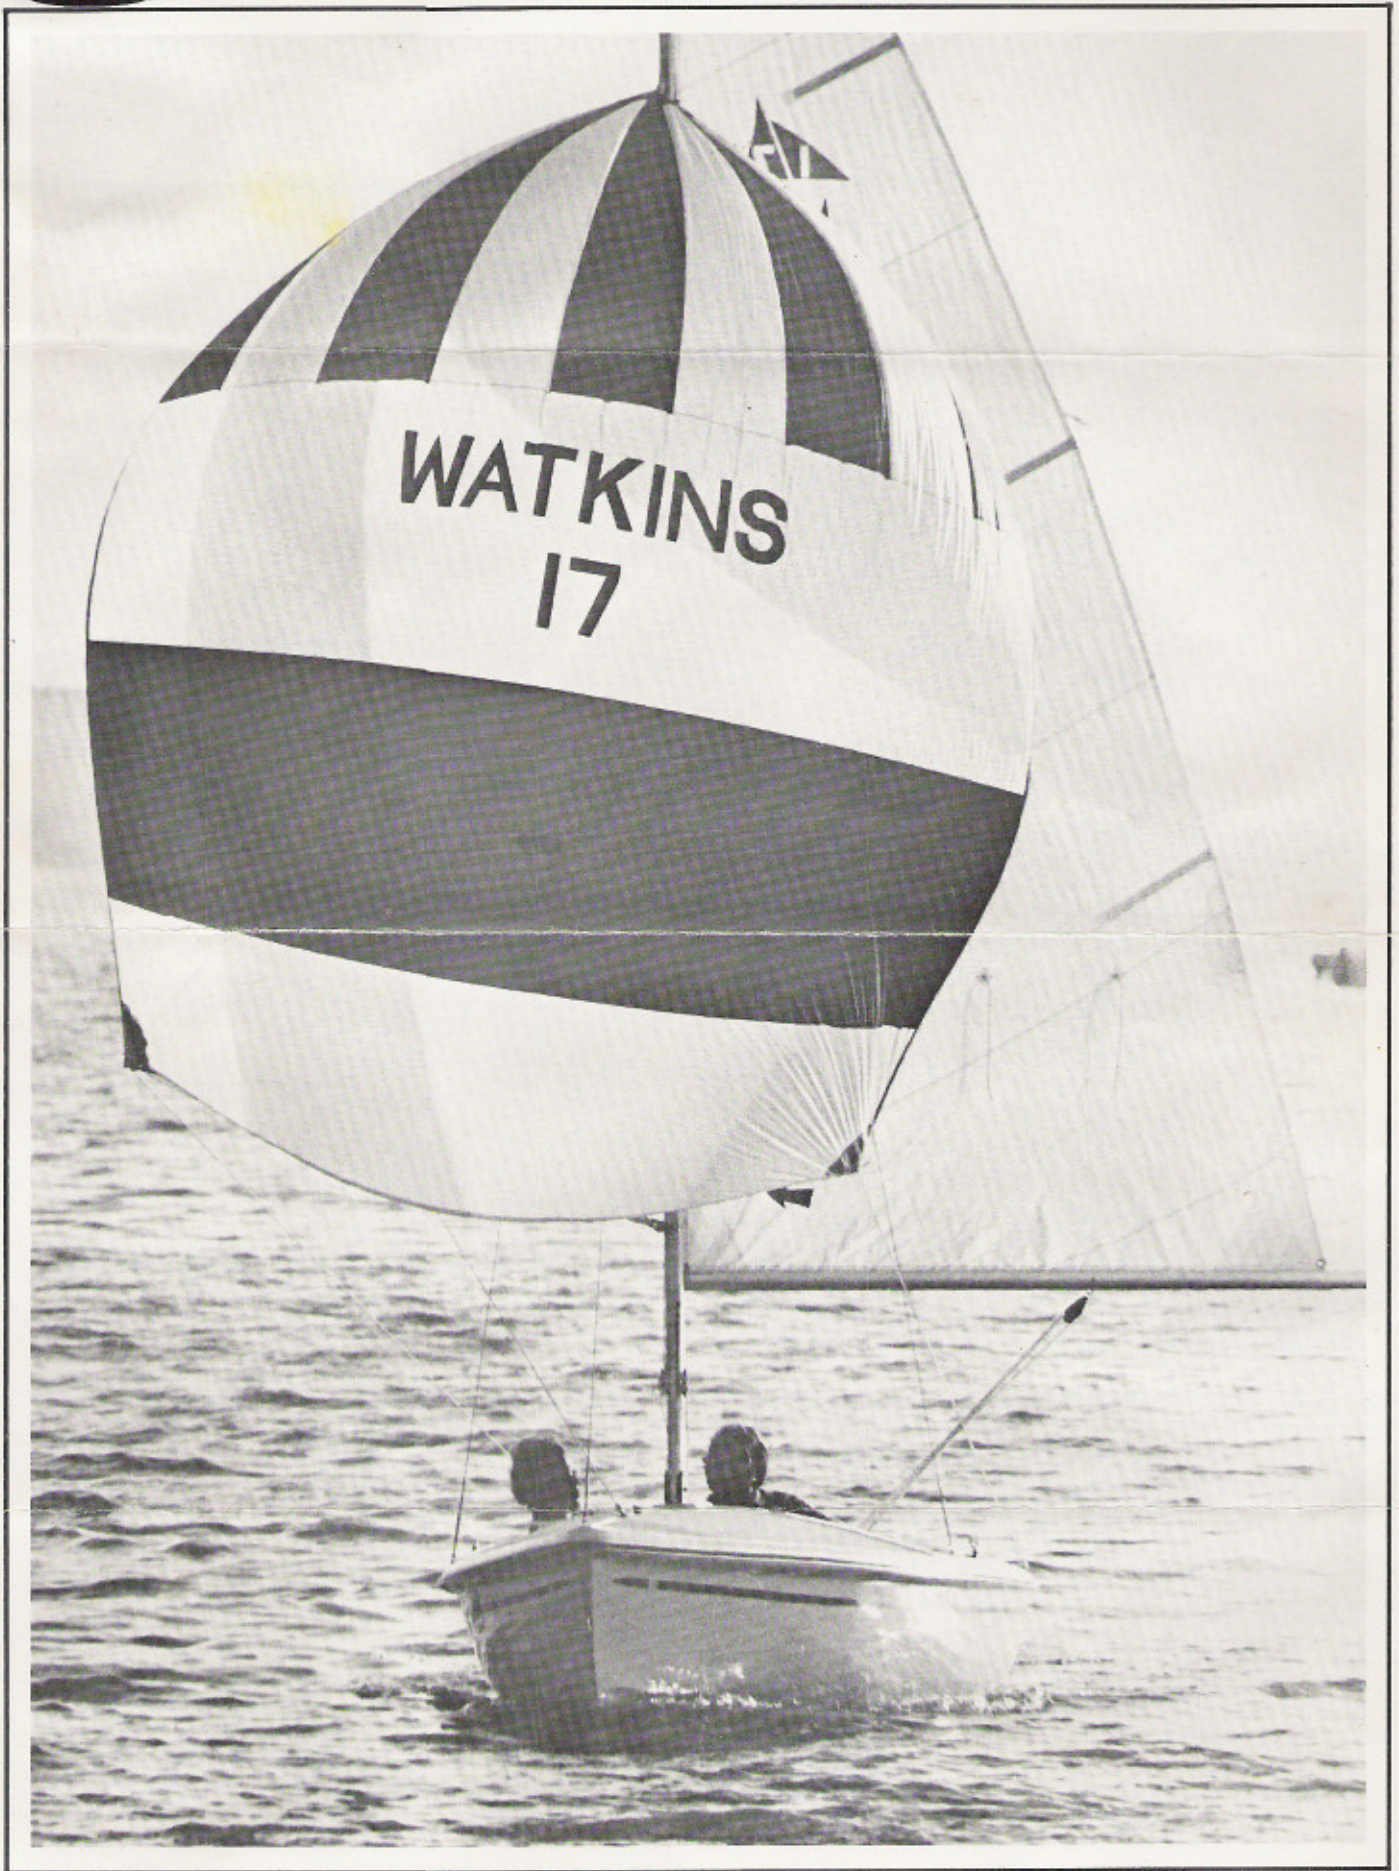

For dealer use



**SPECIFICATIONS**

- LOA ..... 17'0"
- DWL ..... 15'10"
- Beam ..... 6'5"
- Draft Centerboard up ..... 7"
- Draft Centerboard down ..... 3'6"
- Displacement ..... 580 lbs.
- Ballast external ..... 90 lbs.
- Rig ..... Sloop
- Sail Area (total) ..... 145 sq. ft.
- Cockpit length ..... 10 ft.
- Designer ..... Watkins Bros.

**STANDARD EQUIPMENT**

The hull is laminated in one piece with hand laid 24 oz. woven roving, with additional layers of laminate in high stress areas. The centerboard shute is molded into the hull forming one piece construction. Ninety pounds of centerboard made of hand laid fiberglass and encapsulated lead provide a low center of gravity and minimum angle of heel. The deck is single piece molded fiberglass using alternate layers of hand laid 24 oz. woven roving and mat with plywood core for stiffening. Non skid deck surfaces are molded in. Positive flotation is achieved with over 40 cubic feet of foam as standard equipment. She rides high and is self rescuing with self bailing cockpit. All hardware is thru bolted with 18-8 stainless steel fasteners, a three step bedding procedure and back up plates built in. Mast and boom construction is anodized aluminum with 3/32 inch stainless steel rigging, and forged turnbuckles. The kick up rudder is Phillipine mahogany with a tapered trailing edge. Rudder side plates are anodized aluminum with 1/4 inch wall thickness. She is trailerable and launchable from a hot dipped galvanized trailer.

**WATKINS**  
**Yacht Marine**  
 we build them best

12645-49st.N, Clearwater, FL 33520

Photographs may illustrate optional equipment, for information and prices contact your dealer.