



For dealer use.

### PHASE 3



#### SPECIFICATIONS


LOA	23'0"
DWL	19'8"
Beam	8'0"
Draft Centerboard up	18"
Draft Centerboard down	6'0"
Displacement	2500 lbs.
Ballast internal	750 lbs.
Ballast external	150 lbs.
Total ballast	900 lbs.
Rig	sloop
Sail Area (total)	227 sq. ft.
Water	15 gals.
Sleeping capacity	5
Cockpit length	6'10"
Designer	Watkins Bros.

#### STANDARD EQUIPMENT

Shoal draft keel, completely self-protecting centerboard, one inch stainless steel centerboard pin, trailerable sloop, self righting and self bailing, full mast head rigging, anodized mast, boom, and spreaders, roller reefing, 5/32 inch stainless steel rigging with 3300 pound capacity, oversized turnbuckles, hull mounted chain plates, hinged mast step, wire halyards with braided dacron tails, cockpit sail locker, with security hasp, cockpit ice chest, kick up rudder with cast aluminum upper half and fiberglass bottom, molded in non-skid deck surface, forward hatch, 4 window ports, sliding hatch drop boards and security hasp, rope locker, stainless steel stem head fitting, all fiberglass inner hull component and headliner, non-skid cabin sole, cabin bulkhead with mast support, all hardware thru-bolted with 18-8 stainless steel fasteners, three step bedding procedure, back up plates built in, hand laid 24 oz. woven roving for tensile strength, hull laminated in one piece for impact resistance, stress distribution, and flexural ability, one year warranty.



Photographs may illustrate optional equipment, for information and prices contact your dealer

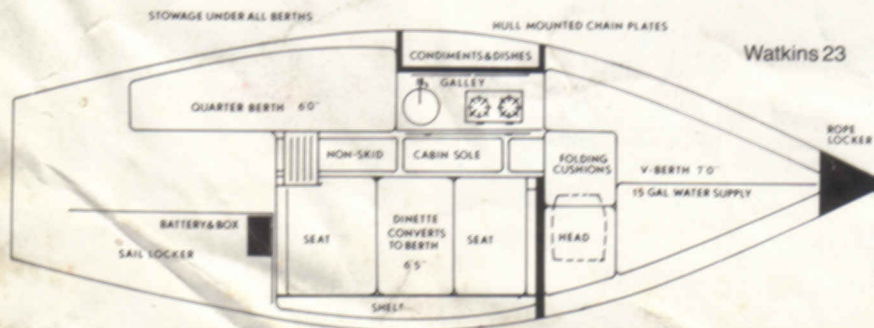

**WATKINS**  
Yacht & Marine, Inc.

**we build them best**

12645 - 49th St. N., Clearwater, FL 33520